


The great value, install it yourself answer to modern balustrades.

Our frameless balustrades, uses powder coated aluminium marine grade stub and face posts, and top quality standard 12mm clear toughened glass, which meets AS/NZ 2208 standard. The Balustrade glass panes come in a range of sizes starting from 950mm high x 600mm wide to 950mm high x 1200mm wide.

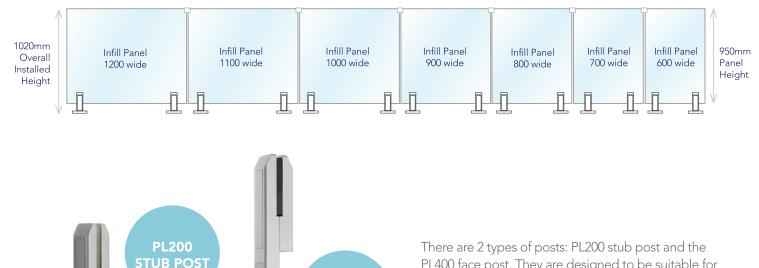

PL400 FACE POST

Installation: Maui supplies one H clamp per glass panel to be used in-between the panels. This is required for code compliance when the fall is greater than 1 metre. For extra safety, we recommend you install an interlinking handrail. For building code compliance, balustrades must be at least 1000mm high. Maui provides an extra 20mm to allow some variation in installation. For any questions,

Maintenance: To ensure your Maui balustrade is kept in good working order, all fittings need to be rinsed regularly with fresh water and wiped with a clean cloth.

PL400 face post. They are designed to be suitable for high wind zones, as per NZS 3604:2011.

This Balustrade System is for use on open timber slated or concrete decks.

Technical information: Where the fall exceeds 1 metre a building consent is required and the installation is considered Restricted Building Work.

Fixings:

- All fixings must be installed to the manufacturers standards
- Strength of base substrate must comply with balustrade regulations (load).

New Zealand Standards Summary: Maui Glass Fencing Systems comply with:

 AS/NZS 2208 New Zealand Standards for Safety Glass Manufacturing

Warranty: 5 Years on all Components.



please email sales@mauiglass.co.nz.